


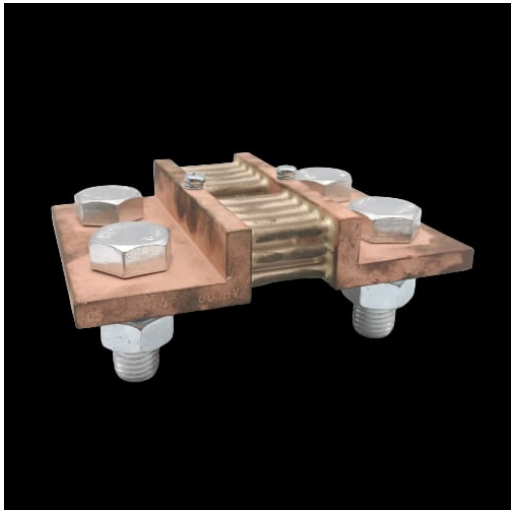

The long-life shunts are used to extend the current measuring range of moving-coil meters for the reliable display and processing of direct currents, especially at high currents of up to 15000A.
The direct current flowing through the shunt generates a proportional voltage drop, which can be displayed for example with a moving-coil measuring device connected in parallel or processed electronically.
The shunts comply with DIN 43703 and DIN EN 60051.
Class 0.2 on request

Technical data	
Accuracy class	0,5
Input	4000 A
Output	60 mV

Variants (3)

Article no.	Description
70032-1112	Shunt 4000A/60mV Kl.0,5 design C
70032-1118	Shunt 6000A/60mV Kl.0,5 design C
70032-1119	Shunt 6000A/60mV Kl.0,2 design C